



MCR
SAFETY

9695
UltraTech
Dipped
Specification Sheet

PRODUCT DESCRIPTION:

UltraTech® provides Ultra comfort, Ultra fit, and Ultra protection! The seamless nylon shell offers outstanding breathability and comfort while the Polyurethane palm and finger coating provides grip, puncture resistance, abrasion resistance and dexterity. Great for small parts handling. The 9695 features a 13 gauge white nylon shell and white polyurethane coating on the palm and fingertips.

FEATURES:

- Great tactile sensitivity
- Excellent comfort and fit
- Excellent grip
- Greater dexterity
- Abrasion resistance

APPLICATIONS:

Aerospace, Aircraft manufacturing, Assembly Line Production, Carpentry, HVAC, Janitorial, Manufacturing



TECHNICAL DATA FOR: 9695

Series	UltraTech	EN 388 : CE Score - Abrasion	4
Material Group	Strings	EN 388 : CE Score - Cut	1
Product Type	Dipped	EN 388 : CE Score - Tear	3
Size	Large	EN 388 : CE Score - Puncture	1
Gauge	13 Gauge	FDA Accepted Materials	FDA Compliant
Material	Nylon		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA


Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2017 MCR Safety - All Rights Reserved



MCR
SAFETY

9695
UltraTech
Dipped
Specification Sheet

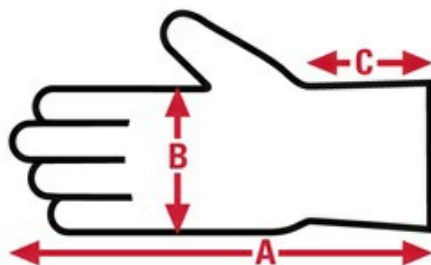

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
9695L	Large	12.637	5.355	2.795	13.416 lb.	1.118
9695M	Medium	12.205	5.118	2.756	12.324 lb.	1.027
9695S	Small	11.811	4.449	2.677	10.416 lb.	0.868
9695XL	X - Large	13.072	5.472	2.835	13.344 lb.	1.112
9695XS	X - Small	11.535	4.213	2.677	10.056 lb.	0.838
9695XXL	XX - Large	13.504	5.591	2.874	13.380 lb.	1.115

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2017 MCR Safety - All Rights Reserved